

# SECURE YOUR DECANTERS AND BOTTLES WITH THE INLINE OR OFFLINE APPLICATION OF A TAMPER EVIDENCE SEAL

## FEATURES

### Ultra-compact design and gentle handling

### Compactness and gentle handling designed for the alcohol and cognac industry

This compact machine fits into the small workshops that are typically found in châteaux or great wines or cognac companies. Its design ensures the gentle handling and transfer of luxury products: the guides and junctions are adapted to protect the bottles and decanters from any contact with metal, and the control and ejection system is designed to not alter the product.



### First opening guarantee on multiple formats


### Freedom of shape and a variety of capacities to secure your decanter collections

This technology guarantees the successive and alternating use of different sizes of carafes and glass bottles with multiple and varied shapes, capacities and closures. Dedicated tools for each format can be directly replaced without tools.

### 30 years of expertise in tamper evidence for luxury products

### Positioning accuracy that guarantees an outstanding quality finish

For a fast and accurate height adjustment of the tamper-evident seal on your range of caps and corks, a confirmation system combined with a position holder ensures an optimal transfer up to the shrink stage. This system is coupled with a sleeve position control module that validates the required quality level.

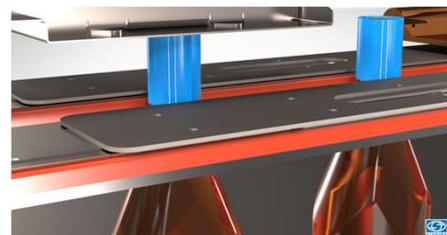


### A semi-automatic module for sleeves splicing with no interruption in production

### An ergonomically designed unwind unit for continuous production

This remote feeder, which can be oriented according to the line configuration, can be easily integrated into the line while maintaining productivity levels. Sleeve splices are made in masked time to avoid production downtime. The easily accessible reels are positioned at eye level, and splices are made on an ergonomically designed table: the best way to facilitate and secure your operators' tasks.

## OPTIONS

### Height positioning module

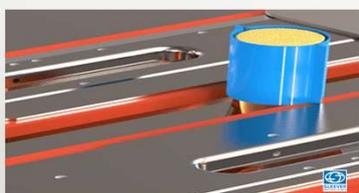

### A control and ejection module that preserves the product or label



### Ethernet communication module



### Mobile tool cart



# SPECIFICATIONS

Non contractual information

## Machine

Conveyor height	980 mm +/- 50mm
Speed	90 cpm
Cutting diameter	100 mm
Electrical consumption	7 KW/h




## Packagings

Materials	Glass
Shapes	Cylindrical , square, complex shapes
Sizes	20 ml - 1,5L
Products diameter	20 - 135 mm
Products height	90 - 300 mm

## Sleeves

Applications	Tamper evidence
Type of films	PET, RPET, OPS
Films thickness	50 à 75 microns

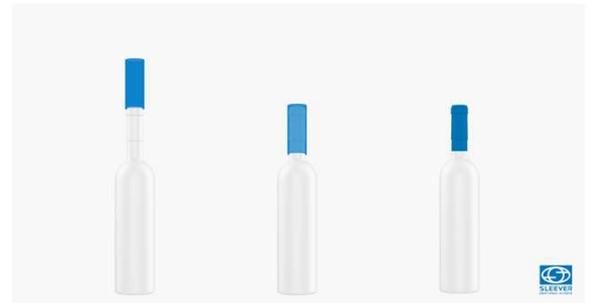

## MARKETS & PACKAGINGS



## Contact Us



Europe and Eastern Europe  
North & South America  
Asia, China & Oceania  
Africa & Middle East



Corporate Office Sleever Machines Group  
ZI Le Val - 15 Avenue Arago  
91420 MORANGIS - FRANCE  
+ 33 (0)1 69 75 75 76 - machines@sleever.com

